

# OneShot®

## Automatic Soap System

401832 Metal  
 401527 Brilliant Brass  
 401528 Brushed Chrome  
 401310 Chrome

### Touch-Free & Trouble-Free Hand Soap System

The automatic touch-free sensor eliminates cross-contamination.

#### System Features

- SmartSensor™ detects user's hand to automatically dispense OneShot™ of soap.
- Red LED light blinks when refill is low.
- Yellow LED light blinks when battery life is low.
  - Average battery life 100 refills or 2 years
- Reset button automatically resets low refill light and primes new soap refill.
- Optional spacer included if the sink rim is 3/4" high or greater.

#### System Specifications


- Capacity: 800mL / 27oz. or 1600mL / 54oz.
- Bright polished chrome spout cover
- Mount through 1" (25mm) diameter hole in lavatory or countertop
- Maximum counter thickness 2" (50.8mm)
- Battery Requirements: 4 Alkaline D Cells (*not included*)
- Activation range is 4" from sensor lens
- Dispenser: #401310
  - Case Pack: 4 Case Weight: 10 lbs. Case Cube: 1.15
- Soap Refills: 800mL
  - #401311 - Lotion Hand Soap with Moisturizers
  - #401312 - Antibacterial Hand Soap
  - #401313 - Lotion Hand Soap
  - Case Pack: 4 Case Weight: 10 lbs. Case Cube: 1.15
- Soap Refills: 1600mL
  - #401541 - Lotion Hand Soap with Moisturizers
  - #401542 - Antibacterial Hand Soap
  - #401543 - Lotion Hand Soap
  - Case Pack: 4 Case Weight: 18 lbs. Case Cube: .50
- Optional Spacer: (included)



Shown in chrome #401310

Case Pack: 4  
 Case Weight: 12 lbs.  
 Case Cube: 1.15

Case Pack: 4  
 Case Weight: 10 lbs.  
 Case Cube: 1.15

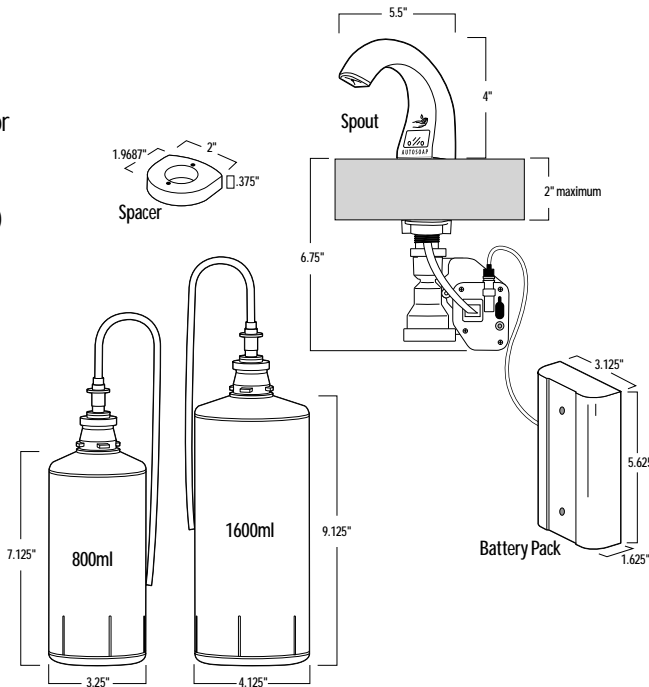

## ***OneShot® Automatic Soap System Quick Installation Instructions***

1. Mount OneShot® dispenser in counter top.
2. Insure all components and wires are installed/connected properly.
3. Before installing refill, insure the tube on the refill bottle is fully inserted into the actuator/pump assembly.
4. Next, unlock pump on refill by twisting counter-clockwise. Actuator will pop up.
5. Guide refill tube up through bottom of motor assembly and up the spout.
6. Lock soap refill into place by turning clockwise a 1/4 turn.
7. **IMPORTANT** - Press the Red refill reset button. This will automatically prime the soap refill bottle.

## ***OneShot® Automatic Soap System Frequently Asked Questions***

What does the red flashing light mean?

***It indicates the refill is low.***

***Please check fill level & change as needed.***

Why is the red light still flashing after the refill has been replaced?

***The RED reset button was not pressed after the new refill was installed.***

***Please press RED read button.***

What does the yellow flashing light mean?

***It indicates the batteries are low.***

***Change batteries if flashing, use ONLY "D" cell alkaline batteries.***

How does one keep soap from dispensing when cleaning?

***Place your finger over the upper right hand or left hand corner of the sensor lens.***

